

Clarke®



SLIM POCKET RECHARGABLE LED WORKLIGHT MODEL NO: PL5R

PART NO: 4003624

USER INSTRUCTIONS

UK
PA | CE



ORIGINAL INSTRUCTIONS

DL0322 ISS 1

INTRODUCTION

Thank you for purchasing this CLARKE LED Worklight.

The PL5R is a rechargeable worklight and torch with lithium ion battery, dimmer switch and USB powered input.

Before attempting to use this worklight, please read this manual thoroughly and follow the instructions carefully.

ENVIRONMENTAL RECYCLING POLICY



Through purchase of this worklight, the customer is taking on the obligation to deal with the WEEE in accordance with the WEEE regulations in relation to the treatment, recycling & recovery and environmentally sound disposal of the WEEE.

In effect, this means that this worklight must not be disposed of with general household waste. It must be disposed of according to the laws governing Waste Electrical and Electronic Equipment (WEEE) at a recognised disposal facility.

GUARANTEE

This worklight is guaranteed against faulty manufacture for a period of 12 months from the date of purchase. Please keep your receipt which will be required as proof of purchase.

This guarantee is invalid if the worklight is found to have been abused or tampered with in any way, or not used for its intended purpose.


Faulty goods should be returned to their place of purchase, no worklight can be returned to us without prior permission.

This guarantee does not effect your statutory rights.

SAFETY INSTRUCTIONS

1. Read these instructions carefully before use and keep them for future reference.
2. **DO NOT** look directly into the worklight when it is switched on.
3. Keep the worklight out of the reach of children.
4. Charge the worklight in a dry indoor location.
5. **DO NOT** immerse in water or any other liquid.
6. **ALWAYS** fully charge before first use.
7. **DO NOT** turn on the light when charging.
8. **DO NOT** leave the worklight on charge for more than 24 hours.
9. **DO NOT** disassemble the worklight as there are no user changeable parts.
10. Recharge the worklight every six months.
11. This worklight utilise a rechargeable Lithium-ion battery that can rupture, ignite and cause serious injury if being used incorrectly.
12. Please check the following safety rules:
 - **DO NOT** place batteries and worklight in a fire or high temperature.
 - **DO NOT** tamper with the battery or wiring.
 - **DO NOT** puncture or damage the batteries.
 - **DO NOT** dispose of the worklight in a fire or water.
13. Failure to heed these warning may result in personal injury or property damage.
14. The light source contained in this worklight has a life expectancy of approximately 50000 hours after which the worklight should be disposed of according to the laws governing Waste Electrical and Electronic Equipment (WEEE) at a recognised disposal facility.

OVERVIEW

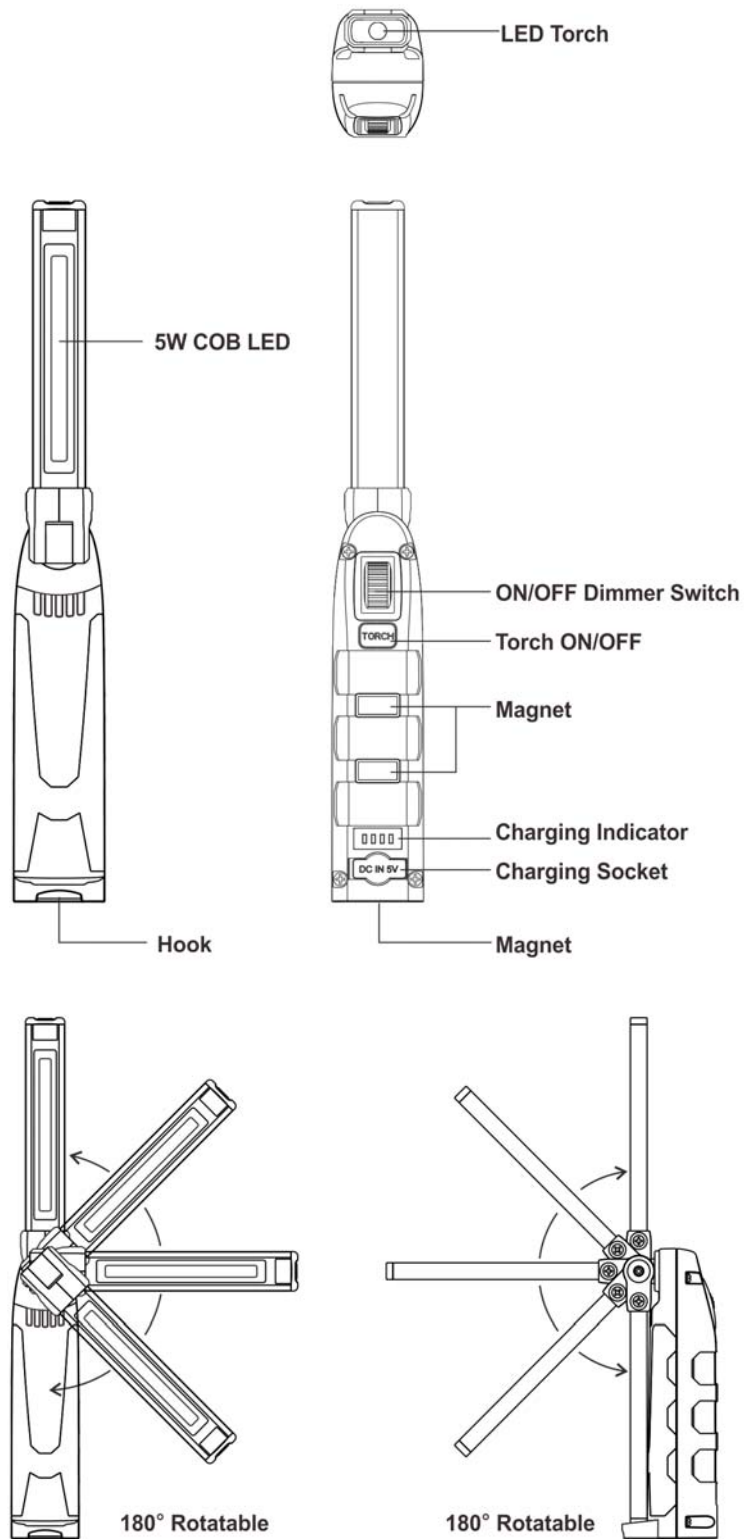


2 Axes Rotatable

Note: Worklight also supplied with a USB plug adaptor and charging cable (not shown).

CHARGING THE WORKLIGHT

NOTE: Charge the work light immediately after purchase, after each use and at least every 6 months. Failure to do this will reduce the battery's capacity and may void the warranty.

1. Open the water resistant cover of the charging socket and connect the USB charging cable supplied to the worklight.
2. Connect the USB end of the cable to the adaptor plug supplied or a USB power supply port.
 - The battery/charging status indicator will flash during charging. All 4 indicator lights will stay on once fully charged.
 - Charging will take approximately 3-4 hours depending on how much power is still in the battery at the start of charging, age of the product and temperature.

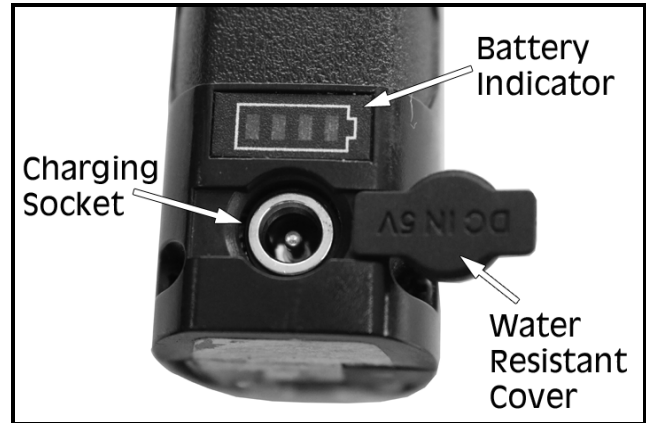


CAUTION: PLEASE MAKE SURE THE ADAPTER USED IS 5.0V/1.0A OR LESS THAN 1.0A IN ORDER TO ENSURE THE WORKLIGHT IS NOT DAMAGED.

OPERATION

NOTE: Please check the worklight for damage before use.

STRIP LIGHT


1. To switch on, roll the dimmer switch wheel upwards. You will hear a click when the light switches on.
2. Use the dimmer switch wheel to select the required light output.

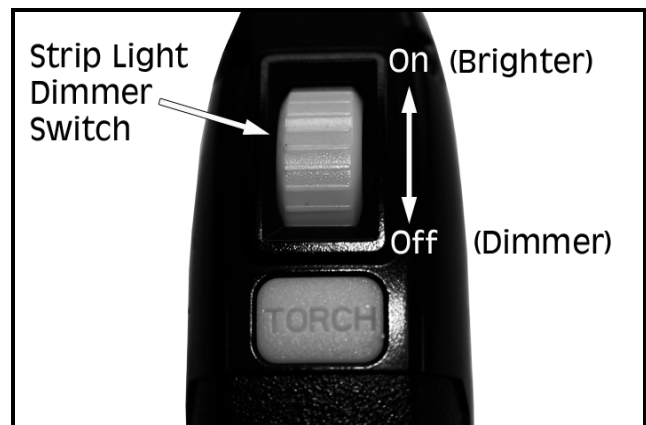

3. Adjust the light to the required position by rotating the light through 2 axes of 180° each (see page 4)
4. The light can be positioned on or above the work area by either the hook on the bottom, or magnets on the back and bottom of the light.
5. To switch off, roll the dimmer switch wheel downwards until you hear the click sound.

TORCH

1. Press the Torch On/Off switch to switch on.
2. Adjust the light to the required position by rotating the light through 2 axes of 180° each (see page 4)
3. The light can be position on or above the work area by either the hook on the bottom, or magnets on the back and bottom of the light.
4. To switch off, press the Torch On/Off switch again.

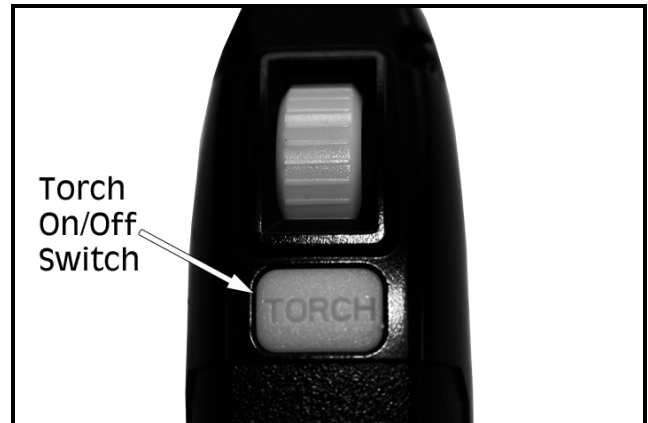

NOTE: Both the strip light and torch can be on at the same time.

TECHNICAL INFORMATION

Model	PL5R
Lithium Ion Battery	3.7v/2600mAh
Charger Input	100V~240V AC, 50-60Hz
Charger Output	5V DC, 1A, 1000mA
Lighting Source	5W COB LED (Strip Light), SMD LED (Torch)
Light Output	400 Lumens (Strip Light), 80 Lumens (Torch)
Ingress Protection (IP rating)	IP20
Approximate Charging Time	3-4 Hrs
Approximate Run Time	3 Hrs (Both Strip Light & Torch on Full Power)
Operating Temperatures	-10°C to +40°C
Dimension (L x W X D)	130mm (235mm, Unfolded) x 30.5mm x 43mm
Weight	128g

DECLARATION OF CONFORMITY - UKCA & EC



Hemnell Street, Epping, Essex CM16 4LG

DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following statutory requirement(s):

Electromagnetic Compatibility Regulations 2016
Electrical Equipment (Safety) Regulations 2016
The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012

The following standards have been applied to the product(s):

BS EN IEC 55014:2019+A11:2020, BS EN IEC 61000-3-2:2019, BS EN 61000-3-3:2013+A1:2019,
BS EN 61547:2009, EN 60598-1:2015, EN 60598-2-4:1997, EN 61558-2-16:2009+A1:2013,
EN 61558-1:2019, EN 62493:2015, IEC 62321-3-1:2013, IEC 62321-6:2015, IEC 62321-7-1:2015.

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned legislation has been compiled and is available for inspection by the relevant enforcement authorities.

The UKCA mark was first applied in: 2022

Product Description: Slim Swivel Head LED Work Light
Model number(s): PL5R
Serial / batch Number: N/A
Date of Issue: 30/03/2022

Signed:

J.A. Clarke
Director

PL5R UKCA Clarke DOC 033022

Page 1 of 1



Fitzwilliam Hall, Fitzwilliam Place, Dublin 2

DECLARATION OF CONFORMITY

This is an important document and should be retained.

We hereby declare that this product(s) complies with the following directive(s):

2014/30/EU *Electromagnetic Compatibility Directive*
2014/35/EU *Low Voltage Directive*
2011/65/EU *Restriction of Hazardous Substances (Amended by 2015/863/EU)*

The following standards have been applied to the product(s):

BS EN IEC 55014:2019+A11:2020, BS EN IEC 61000-3-2:2019, BS EN 61000-3-3:2013+A1:2019,
BS EN 61547:2009, EN 60598-1:2015, EN 60598-2-4:1997, EN 61558-2-16:2009+A1:2013,
EN 61558-1:2019, EN 62493:2015, IEC 62321-3-1:2013, IEC 62321-6:2015, IEC 62321-7-1:2015.

The technical documentation required to demonstrate that the product(s) meet(s) the requirement(s) of the aforementioned directive(s) has been compiled and is available for inspection by the relevant enforcement authorities.

The CE mark was first applied in: 2022

Product Description: Slim Swivel Head LED Work Light
Model number(s): PL5R
Serial / batch Number: N/A
Date of Issue: 30/03/2022

Signed:

J.A. Clarke
Director

PL5R CE Clarke DOC 033022

Page 1 of 1

A SELECTION FROM THE VAST RANGE OF

Clarke®

QUALITY PRODUCTS



AIR COMPRESSORS

From DIY to industrial, Plus air tools, spray guns and accessories.

GENERATORS

Prime duty or emergency standby for business, home and leisure.

POWER WASHERS

Hot and cold, electric and engine driven - we have what you need

WELDERS

Mig, Arc, Tig and Spot. From DIY to auto/industrial.

METALWORKING

Drills, grinders and saws for DIY and professional use.

WOODWORKING

Saws, sanders, lathes, mortisers and dust extraction.

HYDRAULICS

Cranes, body repair kits, transmission jacks for all types of workshop use.

WATER PUMPS

Submersible, electric and engine driven for DIY, agriculture and industry.

POWERTOOLS

Angle grinders, cordless drill sets, saws and sanders.

STARTERS/CHARGERS

All sizes for car and commercial use.

PARTS & SERVICE: 0208 988 7400

Parts Enquiries
Parts@clarkeinternational.com

Servicing & Technical Enquiries
Service@clarkeinternational.com

SALES: UK 01992 565333 or Export 00 44 (0)1992 565335

Clarke INTERNATIONAL Hemnall Street, Epping, Essex CM16 4LG
www.clarkeinternational.com